



END OF LIFE

ODIN-10G-3S-2P-CU


Tri-speed 2-port 10G L2-3 test module

The Odin-10G-3S-2P-CU is a wire-speed 2 port 10Gbase-T/1000BASE-T/100BASE-TX Ethernet test module that can scale to 6 ports via a software upgrade. Based on Xena's advanced architecture, the Odin-10G-3S-2P-CU is a proven solution for testing 10G Ethernet at Layers 2-3. It is available for both the 4U 12-slot ValkyrieBay chassis and the robust transportable 1U ValkyrieCompact chassis.

The Odin-10G-3S-2P-CU comes complete with Xena's free ValkyrieManager software - an easy-to-use GUI for handling both routine and advanced test schedules that includes ValkyrieCLI, Valkyrie2544, Valkyrie1564, Valkyrie3918 and Valkyrie2889.

TOP FEATURES - Odin-10G-3S-2P-CU

- Price/performance
- Scales to 6 ports via SW upgrade
- Advanced architecture
- Free software (incl. ValkyrieManager, ValkyrieCLI, Valkyrie2544, Valkyrie1564, Valkyrie3918 and Valkyrie2889)
- Three years' free software updates
- Three years' hardware warranty
- Free tech support (product lifetime)

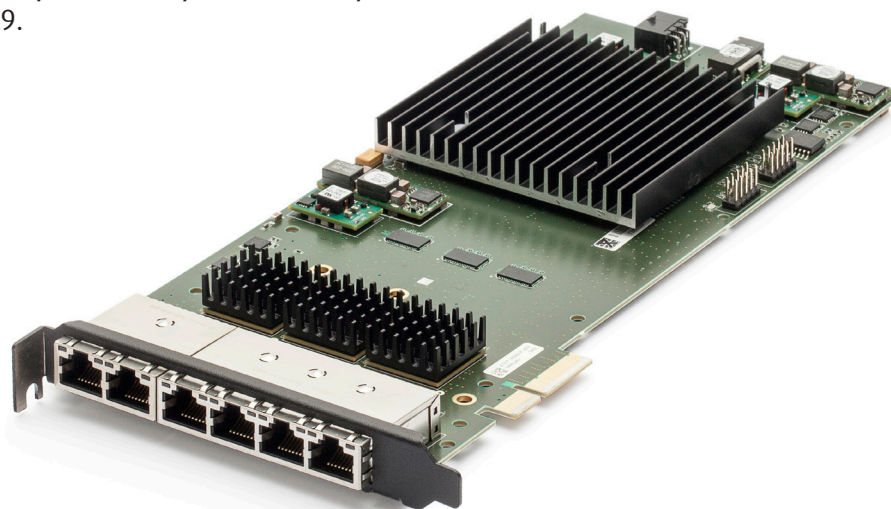

PORT LEVEL FEATURES

Interface category	100/1000/10000M Ethernet
Number of test ports	2 x 100/1000/10000M (can be scaled to 6 ports via factory-performed SW upgrade)
Interface options	10GBase-T (IEEE 802.3an) / 1000BASE-T (IEEE 802.3ab) / 100BASE-T (IEEE 802.3u)
Interface Characteristics	10GBase-T operating at 300ft (100m) over CAT6a and CAT7 UTP cable. 1000Base-T and 100Base-T operating on standard Category 5e UTP cable.
Port statistics ¹⁾	Link state, FCS errors, pause frames, ARP/PING, error injections, training packet All traffic: RX and TX Mbit/s, packets/s, packets, bytes Traffic w/o test payload: RX and TX Mbit/s, packets/s, packets, bytes
Adjustable Inter Frame Gap (IFG)	Configurable from 16 to 56 bytes, default is 20B (12B IFG + 8B preamble)
Transmit line rate adjustment	Ability to adjust the effective line rate by forcing idle gaps equivalent to -1000 ppm (increments of 10 ppm)
Transmit line clock adjustment	From -400 to 400 ppm in steps of 0.001 ppm (shared across all ports)
ARP/PING	Supported (configurable IP and MAC address per port)
Field upgradeable	System is fully field upgradeable to product releases (FPGA images and Software)
Histogram statistics ¹⁾	Two real-time histograms per port. Each histogram can measure one of RX/TX packet length, IFG, or latency distribution for all traffic, a specific stream, or a filter
Loopback modes	<ul style="list-style-type: none"> • L1RX2TX - RX-to-TX, transmit byte-by-byte copy of the incoming packet • L2RX2TX - RX-to-TX, swap source and destination MAC addresses (*only at 10G) • L3RX2TX - RX-to-TX, swap source and destination MAC addresses and IP addresses (*only at 10G) • TXON2RX - TX-to-RX, packet is also transmitted from the port • TXOFF2RX - TX-to-RX, port's transmitter is idle • Port-to-port - Inline loop mode where all traffic is looped 100% transparent at L1
Tx disable	Enable/disable of optical laser or copper link
IGMPv2 multicast join/leave	IGMPv2 continuous multicast join, with configurable repeat interval
Oscillator characteristics	<ul style="list-style-type: none"> • Initial Accuracy is 3 ppm • Frequency drift over 1st year: +/- 3 ppm (over 15 years: +/- 15 ppm) • Temperature Stability: +/- 20 ppm (Total Stability is +/- 35 ppm)



END OF LIFE

TRANSMIT ENGINE

Number of transmit streams per port	256 (wire-speed) Each stream can generate millions of traffic flows through the use of field modifiers
Test payload insertion per stream	Wire-speed packet generation with timestamps, sequence numbers, and data integrity signature optionally inserted into each packet.
Stream statistics ¹⁾	TX Mbit/s, packets/s, packets, bytes, FCS error, Pause
Bandwidth profiles	Burst size and density can be specified. Uniform and bursty bandwidth profile streams can be interleaved
Field modifiers	16-bit header field modifiers with inc, dec, or random mode. Each modifier has configurable bit-mask, repetition, min, max, and step parameters. 5 modifiers per stream
Packet length controls	Fixed, random, butterfly, and incrementing packet length distributions. Packet length from 56 to 16384 bytes
Packet payloads	Repeated user specified 1 to 18B pattern, a 8-bit incrementing pattern
Error generation	Undersize length (56B min) and oversize length (16384 max.) packet lengths, injection of sequence, misorder, payload integrity, and FCS errors
TX packet header support and RX autodecodes	Ethernet, Ethernet II, VLAN, ARP, IPv4, IPv6, UDP, TCP, LLC, SNAP, GTP, ICMP, RTP, RTCP, STP, MPLS, PBB, or fully specified by user
Packet scheduling modes	<ul style="list-style-type: none"> • Normal (stream interleaved mode). Standard scheduling mode, precise rates, minor variation in packet inter-frame gap. • Strict Uniform. New scheduling mode, with 100% uniform packet inter-frame gap, minor deviation from configured rates. • Sequential packet scheduling (sequential stream scheduling). Streams are scheduled continuously in sequential order, with configurable number of packets per stream. • Burst. Packets in a stream are organized in bursts. Bursts from active streams form a burst group. The user specifies time from start of one burst group till start of next burst group.

RECEIVE ENGINE

Number of traceable Rx streams per port	2048 (wire-speed)
Automatic detection of test payload for received packets	Real-time reporting of statistics and latency, loss, payload integrity, sequence error, and misorder error checking
Jitter measurement	Jitter (Packet Delay Variation) measurements compliant to MEF10 standard with 8 ns accuracy Jitter can be measured on up to 32 streams
Stream statistics ¹⁾	<ul style="list-style-type: none"> • RX Mbit/s, packets/s, packets, bytes. • Loss, payload integrity errors, sequence errors, misorder errors • Min latency, max latency, average latency • Min jitter, max jitter, average jitter
Latency measurements accuracy	±8 ns
Latency measurement resolution	8 ns (<i>Latency measurements can calibrate and remove latency from transceiver modules</i>)
Number of filters:	4 x 64-bit user-definable match-term patterns with mask, and offset 4 x frame length comparator terms (longer, shorter) 4 x user-defined filters expressed from AND/OR'ing of the match and length terms.
Filter statistics ¹⁾	Per filter: RX Mbit/s, packets/s, packets, bytes.

CAPTURE

Capture criteria	All traffic, stream, FCS errors, filter match, or traffic without test payloads
Capture start/stop triggers	Capture start and stop trigger: none, FCS error, filter match
Capture limit per packet	16 - 16384 bytes
Wire-speed capture buffer per port	64 kB
Low speed capture buffer per port (10Mbit/sec)	4096 packets (any size)

ENERGY EFFICIENT ETHERNET (EEE)

Energy Efficient Ethernet	<ul style="list-style-type: none"> - Enable/Disable EEE for 10G and 1G speeds - Enable/Disable low-power mode in the TX direction (independently of the RX direction) - Monitor active/low-power mode transition activity in both TX and RX direction
Signal-to-noise ratio (SNR)	Read out the SNR for each of the four electrical channels (measured on cable-insert).

1) Counter size: 64 bits

SPECIFICATIONS

Dimensions

1U ValkyrieCompact

- W: 19" (48.26 cm)
- H: 1.75" (4.45 cm)
- D: 9.8" (25 cm)
- Weight: 10 lbs (4.5 kg)

4U ValkyrieBay

- W: 19" (48.26 cm)
- H: 7" (17.78 cm)
- D: 19.7" (50 cm)
- Weight: 36.4 lbs (16.5 kg)

Power

- AC Voltage: 100-240V
- Frequency: 50-60Hz
- Max. Power: 90W (ValkyrieCompact) / 120W (ValkyrieBay)
- Max. Current: 0.8A with 120V supply, and 0.4A with 240V supply

Regulatory

- FCC (US), CE (Europe)

Environmental

- Operating Temperature: 10 to 35° C
- Storage Temperature: -40 to 70° C
- Humidity: 8% to 90% non-condensing
- Max. noise: 58 dBA



www.xenanetworks.com
Sales contact: sales@xenanetworks.com