

AggregatorTAP: Copper High Density

1G | 1U | Aggregation, Breakout and Regeneration



*1U Rackmount kit included

Network test access points (TAPs) are hardware tools that allow you to access and monitor your network. TAPs are purpose-built hardware devices that let you see every bit, byte and packet.®

AggregatorTAPs are used to capture 100% full duplex traffic that can then be sent to multiple monitoring appliances to analyze your network. AggregatorTAPs supports aggregation and regeneration/SPAN modes, as well as tap 'breakout' mode, providing flexibility to manage your network.

Key Features •








- 1U High Density Solution
 - TAP up to 4 network segments
 - Aggregate traffic to 1 or 2 monitoring ports
 - Can fit to 2 INT1G10CSA units in 1U space
- Link Speed Synchronization
- Link Failure Propagation (LFP)
- Supports tap 'breakout,' aggregation, regeneration/SPAN modes
- Supports jumbo frames
- Passes physical errors
- Dual internal AC power supplies
- 100% secure and invisible; no IP address, no MAC address; cannot be hacked
- Made, tested and certified in USA

APPLICATIONS:

- Capture full duplex traffic from both directions.
- Aggregate the same four links to another monitoring port on different appliance.

SOLUTIONS:

AggregatorTAPs are ideal for:

-  Wireshark
-  Analyzers
-  Intrusion Detection System
-  Application Performance Monitoring
-  Lawful Intercept
-  Packet Capture
-  Data Forensics

Competitive Edge

- High density design.
- Design supports breakout, aggregation, regeneration/SPAN modes.
- Tested and Certified.



Have Questions?

sales@garlandtechnology.com
+716.242.8500
garlandtechnology.com

AggregatorTAP: Copper High Density

1G | 1U | Aggregation, Breakout and Regeneration


Model #	Network Speed	Media		Modes			
		Network	Monitor	Breakout	Aggregation	Regeneration	Bypass
1U Rack Mount Kit included - Holds 2 INT1G10CSA							
INT1G10CSA	10/100/1000M	4 Copper - RJ-45	2 SFP	Yes	Yes	Yes	No

Additional Specifications


Voltage: 90 - 264VAC
Current: 1.8 Amps at 115VAC
Ambient Temp.: 0C to +40C / +32F to +104F
Operating Re. Humidity: 90% non-condensing

Dimensions (HxWxD):
 1.75" x 8.35" x 17.3"
 (44.45mm x 212.1mm x 439.4mm)
Weight: 4.0lbs (1.81kg)

Network Flow

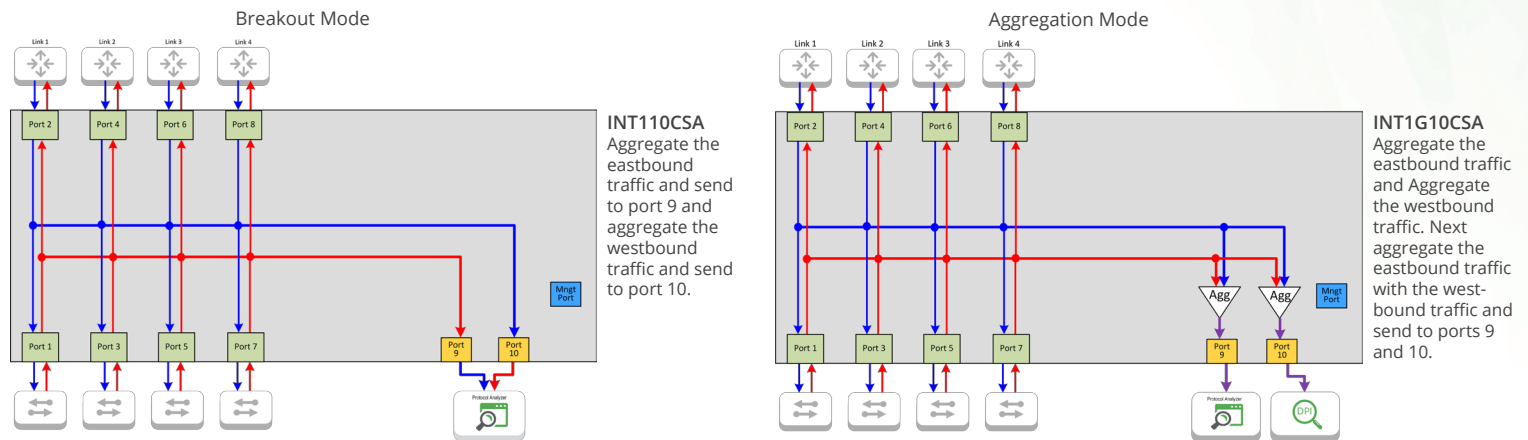

Use Case

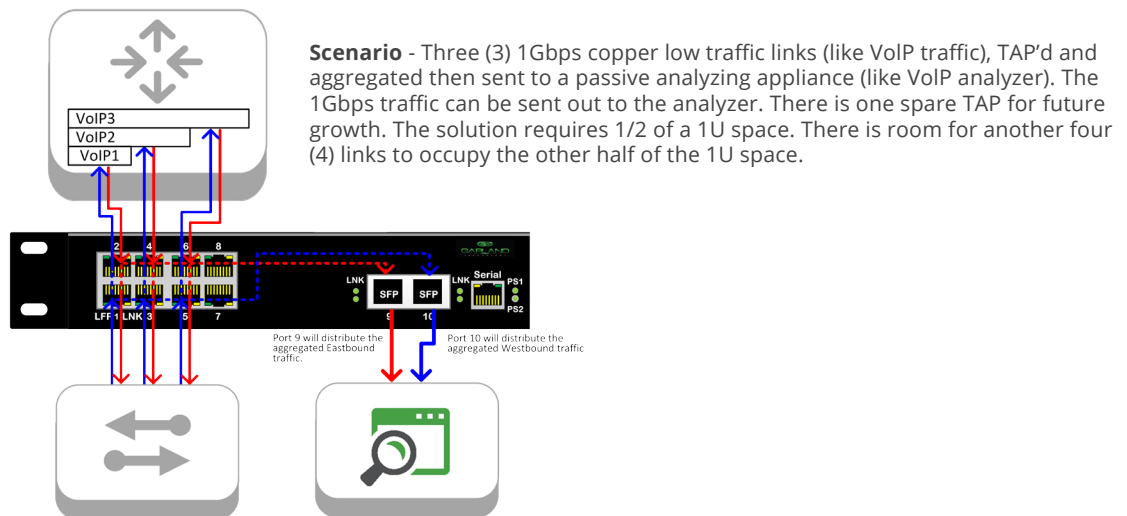

This document is for informational purposes only. The information in this document, believed by Garland Technology to be accurate as of the date of publication, is subject to change without notice. Garland Technology assumes no responsibility for any errors or omissions in this document and shall have no obligation to you as a result of having made this document available to you or based upon the information it contains. ©2019 Garland Technology LLC. All Rights Reserved.